



Motorised charging and anti-condensation unit

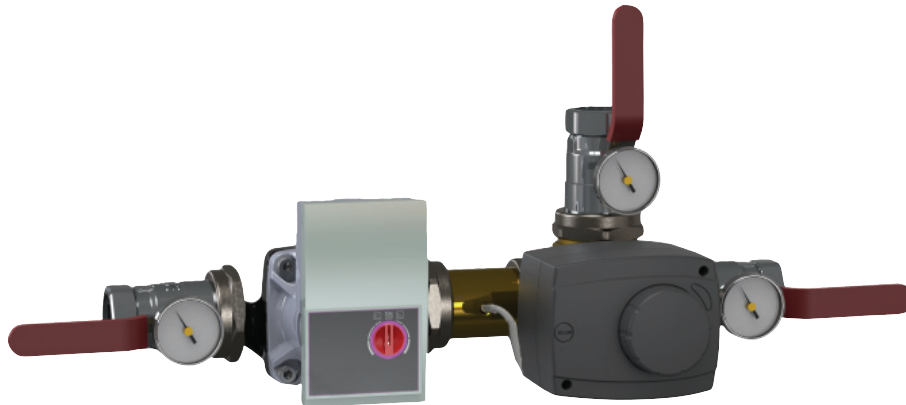

Laddomatic is a motorised charging unit for biofuel boilers.

The charging unit is based on our reliable mixing valves and our renowned Thermomatic range.

- Laddomatic is easy to install and is designed to keep a precisely set return temperature to the boiler. This protects the boiler against corrosion and tar formation, which extends the service life of the boiler.
- The charging unit increases the boiler's efficiency by rapidly ensuring that the correct operating temperature is reached.
- The accumulator tank is charged at a low flow in order to ensure that perfect separation is achieved.
- Our Thermomatic range ensures precision control.

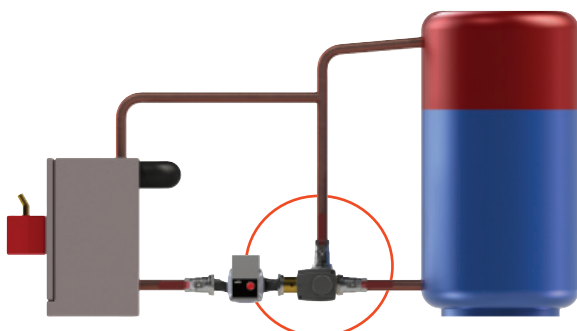

Technical data

Pump:	6 m (max 70 kW) 7,5 m (max 80 kW) 10 m (max 220 kW) 12 m (max 240 kW)
Flow characteristics:	Linear / Kvs 10, Kvs 18
Connection:	R32 R40 adapterkit R50 adapterkit
Max. boiler output:	240 kW (see diagram)
Actuator:	Thermomatic TVM Thermomatic CC

